


SKY PLINTH OPTIONS

No gutters to ClearSpan rooflight.
Water to drain off glass roof
directly onto flat roof.

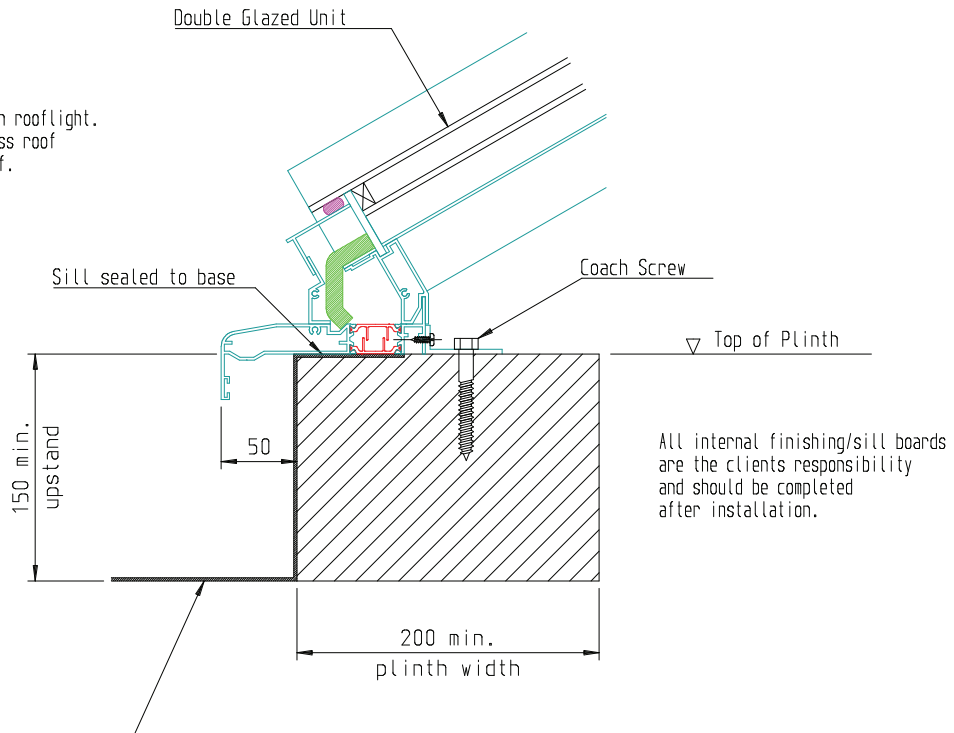


Code 4 Lead Flashing, or other similar roofing material, around roof. To be lapped up & over front face all round roof plinth.

ALL LEAD FLASHING IS THE RESPONSIBILITY OF THE CLIENT/BUILDER.

Roof Plinth detail A-A Scale 1:5

Typical section thro' timber plinth.
Top of plinth to be minimum 150mm above top of roof detail.
200mm minimum width of plinth required. This is excluding the Lead Flashing thickness.

No gutters to ClearSpan rooflight.
Water to drain off glass roof
directly onto flat roof.

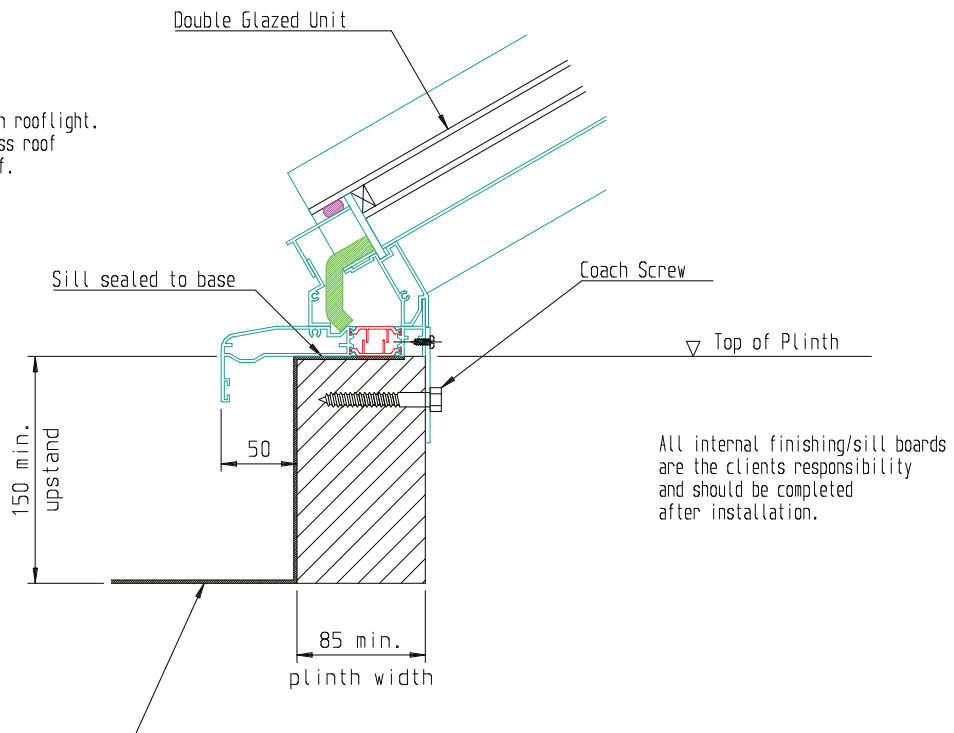

Code 4 Lead Flashing, or other similar roofing material, around roof. To be lapped up & over front face all round roof plinth.

ALL LEAD FLASHING IS THE RESPONSIBILITY OF THE CLIENT/BUILDER.

Roof Plinth detail A-A Scale 1:5

Typical section thro' timber plinth.
Top of plinth to be minimum 150mm above top of roof detail.
85mm minimum width of plinth required. This is excluding the Lead Flashing thickness.